




Power Supplies

Switch-Mode Power Supplies,
Electronic Circuit Protection
and Accessories

MURR
ELEKTRONIK
stay connected

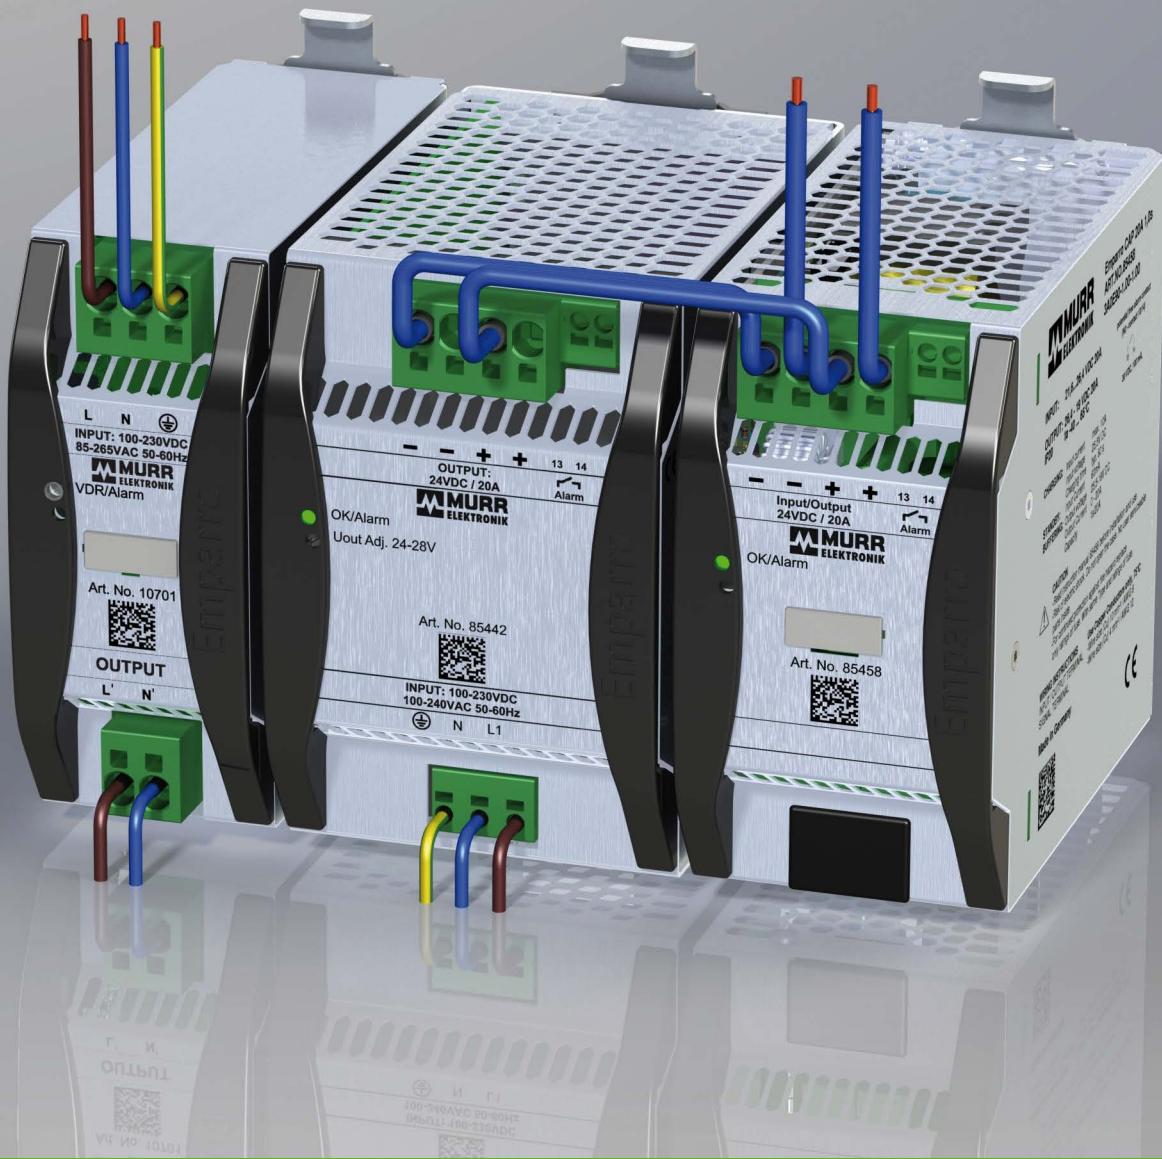

Did you know...?

Facts about Murrelektronik

- Founded in 1975 by Franz Hafner
- Family-owned and operated company
- More than 3,030 employees worldwide
- Representatives in more than 50 countries
- 5 Production facilities
- Over 1 million articles in stock

The Emparro System – a Perfect Match

- Filter, power supply, buffer module and UPS module
- Cutting edge technology
- Consistent handling
- Uniform design
- Optimum EMC compatibility
- Maximum system availability

The Core of Your Control Cabinet

The switch-mode power supply is the core of your control cabinet – and Murrelektronik's power supplies are the perfect regulators.

Our focus is to provide consistent, constant output voltages for your system – independent of how much input voltage fluctuates. We provide you with the most reliable solutions for almost any application, for example: in the machine tool building industry, in the processing industry or in the shipbuilding industry. Our wide product range of power supplies designed with cutting edge technology make sure that you have the best product for your requirements.

Our certified, in-house test center ensures that our switch-mode power supplies are well-engineered and operate perfectly. Our power supplies have many approvals and feature a wide input voltage range, which makes them suitable for global applications. We are represented all over the world with branch offices and distributors: You can buy our products in over 40 countries.



Murrelektronik's Power Supply Systems

- Comprehensive product range with switch-mode power supplies, transformers, buffer and UPS modules, redundancy modules, electronic circuit protection and much more
- High flexibility with the right model for your requirements
- 100 % compatible
- For global applications
- Our system specialists will help you create your perfect power supply system
- Durable units ensures system availability



Functions	Eco Power	Eco-Rail-2	Emparro® 1~ DIN-Rail	Emparro® 1~ Screw Mounting	Emparro® 1~ Coated PCB	Emparro® 3~ DIN-Rail	Emparro® 3~ Screw Mounting	Emparro® 3~ Coated PCB	Emparro67	Emparro67 Hybrid
Screw terminal	x	x				x	x	x		
Spring clamp terminal			x	x			x	x		
Connector									x	x
DIN rail mounting		x	x		x	x		x		
Screw connection				x			x		x	x
Full power up to 40 °C	x	x	x	x	x	x	x	x	x	x
Full power up to 60 °C			x	x	x	x	x	x	x	x
20 % more power up to 45°C			x	x	x	x	x	x		
50 % Power boost			x	x	x	x	x	x		
Derating up to 55 °C	x	x								
Derating up to 70 °C			x	x	x	x	x	x	x	x
Automatic wide voltage input 90...265 V	x ¹	x ¹	x	x	x				x	x
Automatic wide voltage input 360...520 V						x	x	x		
Parallel connection			x	x	x	x	x	x		
Series connection	x	x	x	x	x	x	x	x		
AC and DC input			x	x	x	x	x	x	x	x
Coated PCB						x	x	x		
UL		x	x	x	x	x	x	x	x	x
DNV-GL			x	x	x	x	x	x		
Alarm contact			x	x	x	x	x	x		
IO-Link										x ¹
IP67									x	x
Integrated electronic circuit protection (Mico)										x ¹

¹ some models


Product Selection	Output		85434	85712	9000-11112-0921111	9000-11112-1221111	9000-11112-1421111	85690	85695	87690
	12 V	10 A								
24 V	0,6 A	85150								
	1,3 A	85151	85131							
	2,5 A	85152	85132							
	3,8 A									9000-11112-1862020*
	2x3,8 A									85679*
	4,0 A									9000-11112-1962020
	4,2...5 A	85153	85133	85440	85702	9000-11112-0921111				
	7,5 A	85154								
	8 A									9000-11112-2062020
	10 A	85155	85135	85441	85703	9000-11112-1221111				85676
48 V	20 A		85137	85442	85704	9000-11112-1421111				85677
	2,5 A			85437	85722					85678
	5 A			85438	85723					85687
	10 A			85439	85724	85724				85688
3-phase input	24 V	5 A						85691	85696	87691
		10 A						85692	85697	87692
		20 A						85693	85698	87693
		40 A						85383		
	30,5 V	4 A								

* NEC class 2




Continual short circuit and overload protection

Switch-mode power supplies have different power-down characteristics that make sure the unit's electronics are protected when overloads or short circuits occur. Murrelektronik's power supplies features the following characteristics:

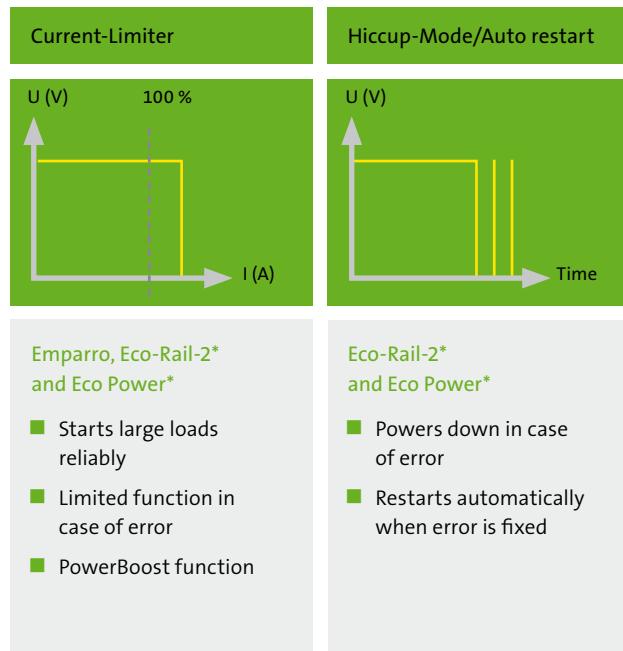

* Diagram applies to models several

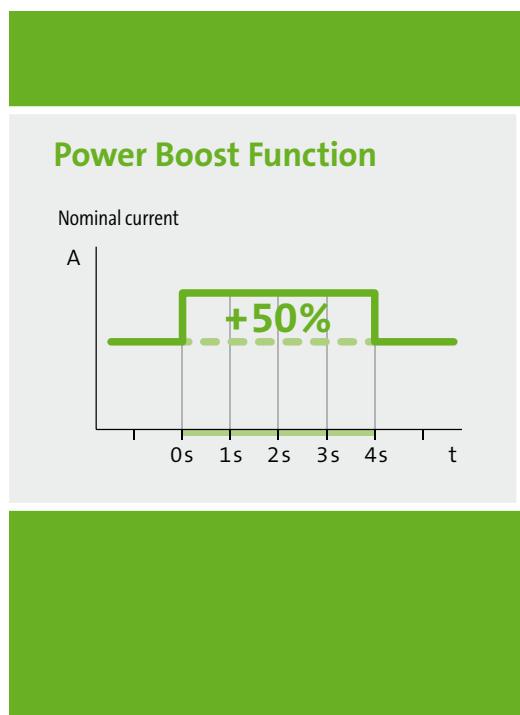

The Current Limiter and Power Limiter functions are excellent for starting capacitive loads. Units with these features do not simply switch off, but they reduce the voltage or provide a higher inrush current with the PowerBoost function.

Before changing over into this protected mode, many of Murrelektronik's power supplies provide an over current four times larger than the nominal current for a few milliseconds. This is another great advantage.



Emparro® 1~




Premium Power

It is our goal to develop new, efficient power supplies. Each percentage of efficiency saves you money and significantly increases machine availability. The degree of efficiency directly influences size, service life and temperature sensitivity of a power supply. A rough estimate is that if a device's temperature is increased by 10 °C/50 °F, the life of the power supply is reduced by half!

An example, your 24 V/10 A unit has an efficiency of 85 %, which corresponds to power loss of 15 % or 36 W. With an efficiency of 95 %, the power loss is instantly reduced by a third: 12 W.

The higher the efficiency the lower the heat generation and the smaller the unit can be.

Emparro vs. Standard Power Supply

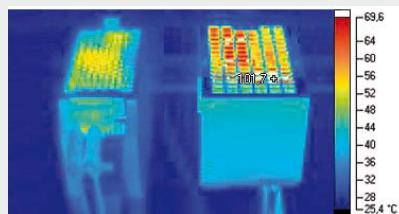

1-phase

- short-circuit and overload-protected
- Power boost 150 %
- Parallel connection possible



Emparro®

OUTPUT: 12...15 VDC
Current: 10 A



Emparro®

OUTPUT: 24...28 VDC
Current: 5 A



Emparro®

OUTPUT: 24...28 VDC
Current: 10 A



Emparro®

OUTPUT: 24...28 VDC
Current: 20 A



Ordering data

	Art. No.	Art. No.	Art. No.	Art. No.
For mounting rail	85434	85440	85441	85442
Fastening with screws	85712	85702	85703	85704
Coated PCB		9000-11112-0921111	9000-11112-1221111	9000-11112-1421111

Input

Input voltage	85...265 VAC/90...250 VDC			
Input current	1.2 A (100 V AC); 0.6 A (240 V AC)	1.3 A (100 V AC); 0.61 A (240 V AC)	2.6 A (100 V AC); 1.1 A (240 V AC)	5.2 A (100 V AC); 2.2 A (240 V AC)
Inrush current after 1 ms	max. 10 A (230 V AC)	max. 5.5 A (230 V AC)	max. 13 A (230 V AC)	max. 23 A (230 V AC)

Output

Output voltage	12...15 V DC adjustable	24...28 V DC adjustable		
Power boost	150 % for 5 seconds / 120 % continuous			
Efficiency	up to 95 %			

Device protection

Device protection	short-circuit and overload-protected (output), Current Limiter			
-------------------	--	--	--	--

General data

Holdup time	> 30 ms at 100 V AC			
LED display	LED green/red			
Temperature range	-40...+60 °C without derating / 60...70 °C Derating (storage temperature -40 ... +85 °C)			
Mounting method	screws on to the mounting rail TH35 (EN 60715)/with screw fastening			
Dimensions (W x H x D)	123 x 50 x 138 mm	123 x 50 x 138 mm	123 x 65 x 167 mm	138 x 85 x 182 mm
Other	Relay alarm contact for short-circuit, overload and overtemperature			

1-phase

- short-circuit and overload-protected
- Power boost 150 %
- Parallel connection possible



Emparro®

OUTPUT: 48...56 VDC
Current: 2.5 A



Emparro®

OUTPUT: 48...56 VDC
Current: 5 A



Emparro®

OUTPUT: 48...56 VDC
Current: 10 A



Emparro HD

OUTPUT: 24...28 VDC
Current: 10 A



Ordering data	Art. No.	Art. No.	Art. No.	Art. No.
For mounting rail	85437	85438	85439	
Fastening with screws	85722	85723	85724	85449
Coated PCB			87439	
Input				
Input voltage	85...265 VAC/90...250 VDC			
Input current	1.2 A (100 V AC); 0.6 A (240 V AC)	2.6 A (100 V AC); 1.1 A (240 V AC)	5.1 A (100 V AC); 2.4 A (240 V AC)	2.6 A (100 V AC); 1.1 A (240 V AC)
Inrush current after 1 ms	max. 3.5 A (230 V AC)	max. 5.5 A (230 V AC)	max. 11 A (230 V AC)	max. 7 A (230 V AC)
Output				
Output voltage	48...56 V DC adjustable			
Power boost	150 % for 5 seconds / 120 % continuous			
Efficiency	up to 95 %			
Device protection	short-circuit and overload-protected (output), Current Limiter			
General data				
Holdup time	> 30 ms at 100 V AC			
LED display	LED green/red			
Temperature range	-40...+60 °C without derating / 60...70 °C Derating (storage temperature -40 ... +85 °C)			
Mounting method	snaps on to the mounting rail TH35 (EN 60715)/with screw fastening			
Dimensions (W x H x D)	123 x 50 x 138 mm	123 x 65 x 138 mm	123 x 85 x 167 mm	111 x 179 x 45 mm
Other	Relay alarm contact for short-circuit, overload and overtemperature			

Emparro HD – Heavy Duty

Perfect for extreme ambient conditions – The Emparro HD switch-mode power supply is designed for use in particularly tough environments to guarantee a reliable supply of electricity.

The preferred application areas for Emparro HD are areas in which power supplies may be installed in a control cabinet, but are still exposed to a variety of external influences, for example on spreaders (lifting equipment for moving containers), construction cranes, and systems of internal conveyor technology.

The Power Supplies are often found on movable parts and are exposed to high induction voltages or weather elements, like extreme temperatures and high air humidity.



Emparro® 3~

Premium Power

■ Maximum reliability

- MTBF of 1,000,000 hours
- Integrated gas discharge valve protects from interference pulses
- Up to 95 % efficiency rating

■ Optimum performance

- Permanently overload protected – up to 20 %
- Power and hyper boost functions for starting high loads

■ Space saving



2-/3-phase

– Short-circuit and overload protected

– Alarm contact



Emparro®

OUTPUT: 24...28 VDC
Current: 5 A



Emparro®

OUTPUT: 24...28 VDC
Current: 10 A



Ordering data

	Art. No.	Art. No.
For mounting rail	85690	85691
Fastening with screws	85695	85696
Coated PCB	87690	87691

Input

Input voltage	3 x 324...572 V AC/450...745 V DC	
Input current	0.45 A (3 x 360 V AC); 0.3 A (3 x 500 V AC)	
Inrush current after 1 ms	max. 9.5 A (3 x 500 V AC)	

Output

Output voltage	adjustable 24 V DC (SELV), ±1%; 24...28 V	
Power Boost	Iout N × 150% (min. 5 s)	
Efficiency	92.5% (3 x 400 V AC); 91.8% (3 x 480 V AC)	

Device protection

Device protection	Short-circuit and overload protected, permanently by 20 % (to 45 °C)	
-------------------	--	--

General data

Holdup time	min. 25 ms (3 x 360 V AC); 5 A (24 V DC)	min. 45 ms (3 x 500 V AC); 10 A (24 V DC)
LED display	LED (green): OK; LED (red): overload, overheating or short-circuit	
Temperature range	-40...+70 °C, ...+70 °C Derating (storage temperature -40...+85 °C)	
Mounting method	Push-In spring clamp terminals	
Dimensions (W x H x D)	123 x 50 x 138 mm	
	123 x 65 x 138 mm	

2-/3-phase

- Short-circuit and overload protected

- Alarm contact

**Emparro®**

OUTPUT: 24...28 VDC
Current: 20 A

**Emparro®**

OUTPUT: 24...28 VDC
Current: 40 A

**Ordering data****Art. No.****Art. No.**

For mounting rail

85692**85693**

Fastening with screws

85697**85698**

Coated PCB

87692**87693****Input**

Input voltage

3 x 324...572 V AC/450...745 V DC

3 x 324...572 V AC/480...745 V DC

Input current

1.3 A (3 x 360 V AC); 1.0 A (3 x 500 V AC)

2.3 A (3 x 360 V AC); 1.6 A (3 x 500 V AC)

Inrush current after 1 ms

max. 13 A (3 x 500 V AC)

max. 14 A (3 x 500 V AC)

Output

Output voltage

adjustable 24 V DC (SELV), ±1%; 24...28 V

Power boost

Iout N × 150% (min. 5 s)

Efficiency

94.8% (3 x 400 V AC); 94.5% (3 x 480 V AC)

93.7% (3 x 400 V AC); 93.5% (3 x 480 V AC)

Device protection

Short-circuit and overload protected, permanently by 20 % (to 45 °C)

General data

Holdup time

min. 40 ms (3 x 500 V AC)

LED display

LED (green): OK; LED (red): overload, overheating or short-circuit

Temperature range

-40...+70 °C, ...+70 °C Derating (storage temperature -40...+85 °C)

Mounting method

Push-In spring clamp terminals

Dimensions (W x H x D)

123 x 65 x 167 mm

138 x 109 x 182 mm



AS-Interface



The latest Emparro® version has been designed for use in AS interface applications with an operating voltage of 30.5 V

The Emparro® switch-mode power supply for AS interface applications rounds off this portfolio. The Emparro® 3-phase switch-mode power supply for AS interface applications offers the same high efficiency as all the other Emparro® switch-mode power supplies. The use of three phases brings about a considerable simplification as the structure becomes more transparent. Three-phase switch-mode power supplies are thus very attractive for AS interface applications and Emparro® is the clear first choice.

An advantage in the installation: The Emparro® 3-phase for AS interface applications is extremely compact and only occupies 50 mm on the DIN rail. Push-in connection terminals make connecting cable installation tool-free. No separate decoupling component is required since the Emparro® 3-phase switch-mode power supplies for AS interface applications separate data from power.

3-phase operation primary switch mode

- Short-circuit and overload-protected (current limiter)
- Power boost 150 %



Emparro

120 W



Ordering data	Current	Art. No.
30...32 V DC	4 A	85383
Input		
Input voltage	3 x 324...572 V AC/450...745 V DC	
Input current	0.45 A (3 x 360 V AC)	
Inrush current after 1 ms	max. 9.5 A	
Output		
Output voltage	adjustable 30.5 V DC (SELV), ±1% ; 30...32 V	
Power boost	Io ut N × 150% (min. 5 s)	
Degree of efficiency	up to 92.5%	
Device protection	short-circuit and overload-protected, permanent by 20% (up to 45 °C)	
Output circuit	Filter according to AS interface specification	
General data		
MTBF	> 1,000,000 h at 40°	
Holdup time	min. 20 ms (3 x 360 V AC); 5 A (24 V DC)	
LED display	LED green/red	
Standards	EN 60950-1, EN 61204-3, EN 61000-3-2, SEMI F47	
Temperature range	-40...+70 °C, ...+70 °C Derating (storage temperature -40...+85 °C)	
Mounting method	screws onto the mounting rail T H35 (EN 60715)	
Dimensions (H x W x D)	123 x 50 x 138 mm	
Other	Relay alarm contact for short circuit, overload and overtemperature	



Emparro67



Power Supply directly next to the load

Emparro67 power supply units are specially designed for applications outside the control cabinet. They withstand extreme environmental conditions and can be installed directly in the field, next to the loads.

Power loss is reduced to a minimum, because the voltage is converted from 230 V AC to 24 V DC directly at the load. Therefore, the energy costs are reduced and smaller cabinets can be used.

Decentralized installation

- Low power loss
- High efficiency of up to 94.2%
- Active PFC
- Ambient temperature up to 85 °C
- Extremely rugged, fully potted IP67 housing
- Contact-safe installation even under full load
- Very flat, compact design

Single-phase, primary switch mode

- short-circuit and overload-protected (current limiter)
- Power boost 150 %

Emparro67 96 W



Emparro67 192 W



Emparro67 91,2 W



Ordering data	Art. No.	Art. No.	Art. No.
	9000-11112-1962020	9000-11112-2062020	NEC class 2 9000-11112-1862020
Current	4 A	8 A	3,8 A
Input			
Input voltage	90...265 VAC/VDC		
Input current	0,5 A at 230 VAC	0,9 A at 240 VAC	0,5 A at 230 VAC
Inrush current after 1 ms	< 9 A	< 7 A	< 10 A
PFC	Active		
Connection	7/8" 3-pole, male		
Output			
Output voltage	24,1 V DC ± 2 %		
Power boost	150 % for 5 seconds		-
Degree of efficiency	up to 92,4 %	up to 94,2 %	up to 91,4 %
Device protection	short-circuit and overload-protected (output), current limiter		
Connection	7/8" 5-pole, female		7/8" 4-pole, female
General data			
Holdup time	> 35 ms at 230 VAC	> 35 ms at 230 VAC	> 80 ms at 230 VAC
Standards	EN 60950-1, EN 61204-3, EN 55022, EN 61000-3-2		
MTBF	960.000 h	820.000 h	1.100.000 h
Temperature range	-25...+60 °C (storage temperature -40...+85 °C) / with derating up to 85 °C		
Mounting method	Screw fastening		
Dimensions (H x W x D)	140 x 109 x 51 mm	175 x 109 x 51 mm	140 x 109 x 51 mm



Emparro67 Hybrid

A new dimension of decentralized power supply

The innovative Emparro67 Hybrid power supply is an all-rounder with many powerful features:

It not only relocates power supply from the control cabinet to the industrial field, but it also monitors currents using two integrated channels for 24 VDC electronic circuit protection, thus ensuring high operational reliability. An IO-Link interface permits extensive and transparent communication.



- Decentralized power supply
- IO-Link interface provides extensive diagnostics
- Integrated electronic circuit protection

Single-phase,
primary switch mode

- short-circuit and overload-
protected (current limiter)

Emparro67 Hybrid



Ordering data	Art. No.	Art. No.	Art. No.	Art. No.
Current	85676	85677	85678	NEC class 2
Input	10 A	10 A	10 A	2x 3,8 A
Input voltage	90...265 VAC/VDC			
Input current	1,1 A at 230 VAC			
Inrush current after 1 ms	< 7 A			
PFC	Active			
Connection	7/8" 3-pole, male			
Output				
Output voltage	24,1 V DC ± 2 %			
MICO outputs	2 outputs, 2-pole-switching			
Output current	max. 8 A / channel, max. 10 A total		2x max 3,8 A	
Degree of efficiency	up to 92,8 %			
Switch-on capacitance	20.000 µF / channel			
Connection	7/8" 5-pole, female	7/8" 4-pole, female	M12 Power, L-coded	7/8" 4-pole, female
IO-Link				
Parameter	ON/OFF, tripping current setting, output voltage setting and many more			
Diagnostics	Output voltage, alarm, life cycle and many more			
Connection	M12, plug			
General data				
Holdup time	> 20 ms at 230 VAC			
Standards	EN 60950-1, EN 61204-3, EN 55022, EN 61000-3-2			
MTBF	430.000 h			
Temperature range	-25...+50 °C (storage temperature -40...+85 °C)			
Mounting method	Screw fastening			
Dimensions (H × W × D)	212 × 109 × 51 mm			

**Single-phase,
primary switch mode**

- short-circuit and overload-protected (current limiter)

Emparro67 Hybrid



IO-Link

Ordering data	Art. No.	Art. No.
Current	10 A	10 A
Input		
Input voltage	90...265 V AC/V DC	
Input current	1,2 A at 240 V AC	
Inrush current after 1 ms	< 5,9 A	
PFC	Active	
Connection	7/8" 3-pole, male	
Output		
Output voltage	24 ... 28 V DC ± 2 %	
MICo outputs	2 outputs, 2-pole-switching	
Output current	max. 8 A / channel, max. 10 A total	max. 8,5 A / channel, max. 10 A total
Degree of efficiency	up to 92,9 %	up to 92,4 %
Switch-on capacitance	20.000 µF / channel	
Connection	7/8" 4-pole, female	M12 5-pole, Power, L-coded
IO-Link		
Parameter	ON/OFF; tripping current setting, output voltage setting and many more	
Diagnostics	Output voltage, alarm, life cycle and many more	
Connection	M12, plug	
General data		
Holdup time	> 20 ms at 230 V AC	
Standards	EN 60950-1, EN 61204-3, EN 55022, EN 61000-3-2	
MTBF	610.000 h	
Temperature range	-25...+50 °C (storage temperature -40...+85 °C)	
Mounting method	Screw fastening	
Dimensions (H x W x D)	212 x 110 x 44,5 mm	



Eco-Rail-2

Eco-Rail-2: focus on the essentials

Eco-Rail-2 power supplies offer manufacturers of machinery and control cabinets the possibility to supply power to their consumers flexibly and economically. These units provide basic functionality and help to monitor the overall costs in the control cabinet.



Eco-Rail-2 Highlights

- Cost efficiency through an excellent price-performance ratio
- Worldwide use, UL certified
- Flexibility due to the range of versions and adjustable output voltage
- Excellent holdup time up to 130 milliseconds
- Practical handling during installation and commissioning

Eco-Power

Eco-Power Power supplies – convincing efficiency

The power supplies of the Eco-Power series meet all basic requirements of power supplies – and their efficiency is convincing. They feature a slim and compact design. The cooling is based on convection. This makes the power supplies from the Eco-Power series particularly suitable for applications in compact installations and customers' machines. Eco-Power units are available in models from 0.6 to 10 A.



Eco-Power Highlights

- Solid perforated housing allows optimum heat dissipation
- Output voltage adjustable from 21.6 to 26.4 V
- Cooling by convection
- Full power with ambient temperatures up to 40° C (105° F)
- Derating up to temperatures of 50° C (122° F)
- Allow operation in series connection
- Flat and compact design
- Easily adjustable wide voltage input
- Screw terminals (IP00) with touch protection

Eco-Rail-2

Single-phase

– short-circuit and overload-protected



Eco-Rail-2
OUTPUT: 23...28 V DC
Current: 1.3 A



Eco-Rail-2
OUTPUT: 23...28 V DC
Current: 2.5 A



Eco-Rail-2
OUTPUT: 23...28 V DC
Current: 5 A



Ordering data	Art. No.	Art. No.	Art. No.
24 V DC	85131	85132	85133
Input			
Input voltage	100...240 V AC		
Input current	0.7 A (100 V AC); 0.4 A (240 V AC)	1.3 A (100 V AC); 0.6 A (240 V AC)	2.4 A (100 V AC); 1.2 A (240 V AC)
Inrush current	max. 10 A (230 V AC)	max. 20 A (230 V AC)	
Output			
Output voltage	adjustable 24 V DC ±1%; 23...28 V		
Output current	1.3 A (+40 °C); 1.0 A (+55 °C)	2.5 A (+40 °C); 2.0 A (+55 °C)	5 A (+40 °C); 4 A (+55 °C)
Efficiency	83% (115 V AC); 84% (230 V AC)	84% (115 V AC); 85% (230 V AC)	87% (115 V AC); 88% (230 V AC)
Unit protection	Short-circuit and overload protected		
Parallel operation/serial operation	no/yes (max. 2 units)		
General data			
Standards	EN 60950-1, EN 61204-3, EN 61000-3-2		
Temperature range	0...+40 °C, ...+55 °C derating (storage temperature -20...+85 °C)		
Mounting method	DIN-rail mountable TH35 (EN 60715)		
Dimensions (W x H x D)	125 x 50 x 72 mm	125 x 50 x 84 mm	125 x 50 x 123 mm
Connection	Screw terminals		

Single-phase

– short-circuit and overload-protected



Eco-Rail-2
OUTPUT: 23...28 V DC
Current: 10 A



Eco-Rail-2
OUTPUT: 23...28 V DC
Current: 20 A



Ordering data	Art. No.	Art. No.
24 V DC	85135	85137
Input		
Input voltage	90...132 V AC/173...264 V AC	
Input current	4.3 A (100 V AC); 2.1 A (240 V AC)	7.8 A (100 V AC); 4.0 A (200 V AC)
Inrush current after 1 ms	max. 18 A (230 V AC)	max. 40 A (230 V AC)
Output		
Output voltage	adjustable 24 V DC ±1%; 23...28 V	
Output current	10 A (+40 °C); 7.5 A (+55 °C)	20 A (+40 °C); 16 A (+55 °C)
Efficiency	86% (115 V AC); 87% (230 V AC)	89% (115 V AC); 90% (230 V AC)
Unit protection	Short-circuit and overload protected	
Parallel operation/serial operation	no/yes (max. 2 units)	
General data		
Standards	EN 60950-1, EN 61204-3, EN 61000-3-2	
Temperature range	0...+40 °C, ...+55 °C derating (storage temperature -20...+85 °C)	
Mounting method	DIN-rail mountable TH35 (EN 60715)	
Dimensions (W x H x D)	125 x 68 x 125 mm	124 x 105 x 124 mm
Connection	Screw terminals	



Eco-Power

**Single-phase operation
primary switch mode**

Eco-Power Current: 0,6 A / 15 W		Eco-Power Current: 1,3 A / 30 W	Eco-Power Current: 2,5 A / 60 W	Eco-Power Current: 5,0 A / 120 W
				
Ordering data	Art. No.	Art. No.	Art. No.	Art. No.
24 V DC	85150	85151	85152	85153
Input				
Nominal voltage	90...264 V AC			
Input current	0.3 A (115 V AC); 0.2 A (230 V AC)	0.7 A (115 V AC); 0.4 A (230 V AC)	1.2 A (115 V AC); 0.5 A (230 V AC)	2.4 A (115 V AC); 1.0 A (230 V AC)
Inrush current	max. 20 A			
Output				
Adjustable output voltage	24 V DC (SELV) ± 1%; 21.6...26.4 V DC			
Nominal output current	0.6 A (+40 °C); 0.5 A (+50 °C)	1.3 A (+40 °C); 1.04 A (+50 °C)	2.5 A (+40 °C); 2.0 A (+50 °C)	5.0 A (+40 °C); 4.0 A (+50 °C)
Efficiency	85 % (115 V AC); 87 % (230 V AC)	85 % (115 V AC); 85 % (230 V AC)	85 % (115 V AC); 87 % (230 V AC)	86 % (115 V AC); 87 % (230 V AC)
Device protection	short-circuit and overload-protected (Hiccup mode)			
Parallel operation/serial operation	no/yes, max. 2 devices			
General data				
Standards	EN 60950-1, EN 61204-3, EN 55011 B			
Temperature range	0...+40 °C, to +50 °C derating (storage temperature -20...+85 °C)			
Mounting method	screw fastening, M3			
Dimensions (W x H x D)	36 x 105 x 77 mm	40 x 135 x 98 mm	41 x 164 x 98 mm	

**Single-phase operation
primary switch mode**

Eco-Power Current: 7,5 A / 180 W		Eco-Power Current: 10 A / 240 W
		
Ordering data	Art. No.	Art. No.
24 V DC	85154	85155
Input		
Nominal voltage	90...132 V AC, 180...264 V AC	
Input current	3.4 A (115 V AC); 1.9 A (230 V AC)	4.6 A (115 V AC); 2.8 A (230 V AC)
Inrush current	max. 20 A	max. 25 A
Output		
Adjustable output voltage	24 V DC (SELV) ± 1%; 21.6...26.4 V DC	
Nominal output current	7.5 A (+40 °C); 6.0 A (+50 °C)	10 A (+40 °C); 8.0 A (+50 °C)
Degree of efficiency	85 % (115 V AC); 86 % (230 V AC)	84 % (115 V AC); 85 % (230 V AC)
Device protection	short-circuit and overload-protected (current limiter)	
Parallel operation/serial operation	no/yes, max. 2 devices	
General data		
Standards	EN 60950-1, EN 61204-3, EN 55011 B	
Temperature range	0...+40 °C, to +50 °C derating (storage temperature -20...+85 °C)	
Mounting method	screw fastening, M3	screw connection, M4
Dimensions (W x H x D)	50 x 205 x 100 mm	50 x 230 x 115 mm



Mico — Electronic circuit protection

Safe and well distributed

Combine your power supplies with MICO, the intelligent power distribution system.

MICO is the intelligent power distribution module from Murrelektronik for 24 VDC and 48 VDC. It monitors currents, indicates when approaching the maximum load and ensures machine availability.

Our suggestion: Combine your power supplies with MICO. You can choose between **Mico Pro®** for modular requirements, **MICO+** with channels that can be switched off and a digital signal with a 90 % warning, **MICO CLASSIC** with adjustable current ranges, **MICO BASIC** with preset nominal currents and **MICO FUSE** with sockets for glass tube fuses.

MICO modules with **NEC Class 2 approval** are available to design load circuits with limited energy, in a simple and cost effective way.



UL
Listed

IEC
Exempt

CS
Listed

Class 2
UL1310/NEC 725

MICO+ 24 V	Description	Adjustable voltage ranges	Art.-Nr.
	MICO+ 4.4, 4-channel**	1, 2, 3, 4 A	9000-41084-0100400
	MICO+ 4.6, 4-channel	1, 2, 4, 6 A	9000-41084-0100600
	MICO+ 4.10, 4-channel	4, 6, 8, 10 A	9000-41084-0401000
MICO Classic 24 V	Description	Adjustable voltage ranges	Art.-Nr.
	MICO Classic 2.4, 2-channel**	1, 2, 3, 4 A	9000-41042-0100400
	MICO Classic 2.6, 2-channel	1, 2, 4, 6 A	9000-41042-0100600
	MICO Classic 2.10, 2-channel	4, 6, 8, 10 A	9000-41042-0401000
	MICO Classic 4.4, 4-channel**	1, 2, 3, 4 A	9000-41034-0100400
	MICO Classic 4.6, 4-channel*	1, 2, 4, 6 A	9000-41034-0100600
	MICO Classic 4.10, 4-channel*	4, 6, 8, 10 A	9000-41034-0401000
	MICO Classic 4.4.10 Actuator-Sensor 4-channel	2x 1, 2, 3, 4, 2x 4, 6, 8, 10 A	9000-41034-0101000
	MICO Classic 4.10 Speed-Start 4-channel	4, 6, 8, 10 A	9000-41034-0401005
MICO Basic 24 V	Description	Pre-fixed voltage ranges	Art.-Nr.
	MICO Basic 4.2, 4-channel**	2 A	9000-41064-0200000
	MICO Basic 4.4, 4-channel**	4 A	9000-41064-0400000
	MICO Basic 4.6, 4-channel*	6 A	9000-41064-0600000
	MICO Basic 8.2, 8-channel**	2 A	9000-41068-0200000
	MICO Basic 8.4, 8-channel**	4 A	9000-41068-0400000
	MICO Basic 8.6, 8-channel*	6 A	9000-41068-0600000
	MICO Basic 5.2/3.6, 8-channel**	5x2 A ; 3x6 A	9000-41068-0200600
	MICO Basic 2.1/3.2/3.4	2x1 A ; 3x2 A ; 3x4 A	9000-41068-0100304
MICO+ 48 V	Description	Adjustable voltage ranges	Art.-Nr.
	MICO+ 4.4, 4-channel**	1, 2, 3, 4 A	9000-42084-0100400
	MICO+ 4.6, 4-channel	1, 2, 4, 6 A	9000-42084-0100600
MICO Fuse 0...250 V	Description	Miscellaneous	Art.-Nr.
	MICO Fuse 24 LED	Delivery without fuses, with LED display and signal contact, 24 V DC	9000-41078-0600001
	MICO Fuse 250	Delivery without fuses, Universal versions ranging from 0...250 V AC/DC	9000-41078-0600002
Note	* With DNV-GL approval For more information, see the onlinehop.murrelektronik.com or request our main catalog. ** With NEC Class 2 approval		



Mico Pro®

Current monitoring modularized

Mico Pro® is the new and innovative current monitoring system from Murrelektronik. The modular system enables you to adapt systems precisely to suit specific applications – offering a favorable cost-benefit ratio while also being economical in their use of space.

The patented tripping process assures optimum machine availability. An additional benefit: an integrated concept for potential distribution that significantly declutters the switch cabinet wiring.

Mico Pro® signals limit loads and switches defective channels off in a targeted manner to prevent total system crashes, and to assure a high level of machine availability.

The tripping process has been patented, and follows the rule: “as late as possible, as early as necessary”.



Mico Pro® PS: Murrelektronik offers power supplies that are specifically designed to be integrated into Mico Pro® stations. Because they replace an existing power supply in the cabinet, your overall cabinet can be smaller. Bridging strips allow you to quickly and easily assemble your desired configuration.



Power module	Description	Art. No.
	Mico Pro PM 24 V DC/40 A Power module, max. 40 A	9000-41190-0000000
	Mico Pro PS 10-100-240/24 Power supply, max. 10 A	9000-41190-0000110
	Mico Pro PS 5-100-240/24 Power supply, max. 5 A	9000-41190-0000105

Mico Pro® stands for:

- **Modularity**
– precise right down to the last channel
- **Integrated potential distribution concept**
– significantly simplifies switch cabinet wiring
- **Practical handling**
– assembly without tools
- **Diagnostics**
– on the module or via the PLC
- **Channel-specific switching**
– replaces the coupling level
- **System**
– Power supply unit and load circuit monitoring in one



Modules with pre-fixed tripping current	Number of channels	Tripping current (pre-fixed)	Art. No.
	Mico Pro fix 1.2	1	2 A Class 2 9000-41011-0200000
	Mico Pro fix 1.4	1	4 A 9000-41011-0400000
	Mico Pro fix 1.4 CL2	1	4 A Class 2 9000-41011-0400001
	Mico Pro fix 1.6	1	6 A 9000-41011-0600000
	Mico Pro fix 1.8	1	8 A 9000-41011-0800000
	Mico Pro fix 1.10	1	10 A 9000-41011-1000000
	Mico Pro fix 1.16	1	16 A 9000-41011-1600000
	Mico Pro fix 2.2	2	2 A Class 2 9000-41012-0200000
	Mico Pro fix 2.4	2	4 A 9000-41012-0400000
	Mico Pro fix 2.6	2	6 A 9000-41012-0600000
	Mico Pro fix 4.2	4	2 A Class 2 9000-41014-0200000
	Mico Pro fix 4.4	4	4 A 9000-41014-0400000
	Mico Pro fix 4.4 CL2	4	4 A Class 2 9000-41014-0400001
	Mico Pro fix 4.6	4	6 A 9000-41014-0600000

Mico Pro®

Modules with adjustable tripping current	Number of channels	Tripping current (flexible adjustment)	Art. No.
	Mico Pro flex 1.10	1	1-2-3-4-5-6-7-8-9-10 A 9000-41091-0101000
	Mico Pro flex 1.20	1	11-12-13-14-15-16-17-18-19-20 A 9000-41091-1102000
	Mico Pro flex 2.10	2	1-2-3-4-5-6-7-8-9-10 A 9000-41092-0101000
	Mico Pro flex 4.10	4	1-2-3-4-5-6-7-8-9-10 A 9000-41094-0101000

Accessories	Description	Art. No.
	Mico Pro PD 2 x 12	Potential distributors, 2x 12 potentials, max 20 A 9000-41000-0000212
	Mico Pro PD 2 x 2 x 6	Potential distributors, 2x 2x 6 potentials, max 20 A 9000-41000-0002206
	Mico Pro Plug-In link 2x blue	Continuous jumper max. 40 A, 500 mm length 9000-41000-0000000
	Mico Pro Plug-In link 2x red	Continuous jumper max. 40 A, 500 mm length 9000-41000-0000001
	Mico Pro Plug-In link 1x blue 1x red	Continuous jumper max. 40 A, 250 mm length 9000-41000-0000002
	Mico Pro Plug-In link 1x blue 1x red	Continuous jumper max. 40 A, 500 mm length 9000-41000-0000003
	Identification label	5x 10 mm, white, 64 units 996078

Packages	Description	Art. No.
	Mico Pro PM + 2 x Flex 4.10	Power Pack Mico Pro, inclusive Plug-in link 250 mm 9101200
	Mico Pro PS 5 + x Flex 4.10	Power Pack PS 5, inclusive Plug-in link 250 mm 9101201
	Mico Pro PS 10 + x Flex 4.10	Power Pack PS 10, inclusive Plug-in link 250 mm 9101203

The redundancy modules




Stock up on safety!

Having the highest machine availability is an important subject. That's why power supply systems are often redundantly designed, with two power supply units. Murrelektronik's redundancy modules decouple two independent power supplies and generate redundant 24 V DC control voltages.

MB Redundancy Balance ensures automatic 50:50 balancing of power between the two units. For example: if the required load current is 10 A, this cabinet component ensures that both units supply 5 A. If one of the two power supply units fails, the other can continue to work because it is decoupled. The only condition is that each unit is in the position to supply the nominal current of the load.

For even load of both power supply units in accordance

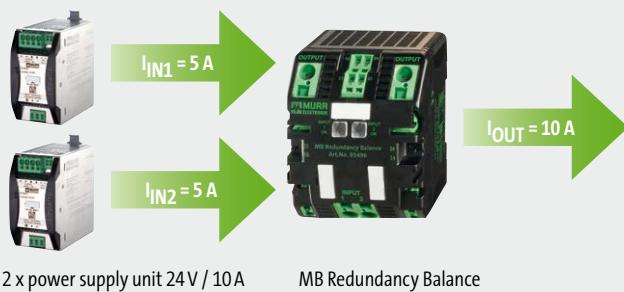

Simple connection



With the integrated bridging system, MB Redundancy Balance can be directly combined with the electronic load circuit control module MICO, without requiring wiring work.

Ordering data	MB Diode	Art. No.	MB Redundancy Basic	Art. No.	MB Redundancy Balance	Art. No.
24 V DC		85396		85495		85496
Input						
Nominal voltage	24 V DC					
Voltage range	21...30 V DC		18...30 V DC			
Nominal current	2 x 20 A / 1x 40 A		2 x 20 A			
Total current	max. 40 A		max. 52 A			
Polarity	int. protection against reverse polarity up to 60 V DC		int. protection against reverse polarity up to 30 V DC			
Output						
Nominal output current	20 A (-25...+55 °C); 40 A (-25...+40 °C)		40 A (-25...+60 °C); 52 A (-25...+40 °C)			
Status display	1 LED per channel					
Signal output (potential-free)	input voltages		input voltages		input voltages / load distribution	
General data						
Connecting type	Spring clamp terminal					
Standards	EN 61000-6-2, EN 61000-6-3					
Bridging concept	both sides using spring clamp terminal or bridge set					
Degree of efficiency	> 97 %		> 99.5 %			
Mounting method	screws onto the mounting rail TH 35 (EN 60715)					
Approvals	UL					

MB Cap — Buffer modules

Stable power supply. Safe Processes.

Murrelektronik's MB Cap Ultra modules are buffer modules that ensure a stable power supply, guaranteeing secure industrial processes. They store energy and bridge voltage fluctuations of up to 38 seconds at 10 A, or for several minutes at 1 A, thanks to maintenance-free ultra capacitors.

With MB Cap Ultra, Murrelektronik offers a range of buffer modules that, in comparison to conventional uninterruptible power supplies (UPS), have integrated ultracapacitors instead of conventional lead batteries. They are maintenance free – replacing batteries is a thing of the past.



Product	Description	Art. No.
MB Cap 20/24 200ms	Nominal voltage: 23...30 V DC, output voltage: 22...28 V DC, max. output current: 20 A Buffer time: 0.2 sec/20 A, 4 sec/1 A	85394
	Nominal voltage: 23...30 V DC, output voltage: 22...28 V DC, max. output current: 20 A Buffer time: 0.2 sec/20 A, 4 sec/1 A, Coated PCB	85184
MB Cap Ultra 3/24 7s	Nominal voltage: 24 V DC, output voltage: 24 V DC, max. output current: 3 A Buffer time: 7 sec/3 A, 21 sec/1 A	85460
	MB Cap Ultra expansion module 3/24 12s Nominal voltage: 24 V DC, output voltage: 24 V DC, max. output current: 3 A Buffer time: 12 sec/3 A, 36 sec/1 A	85462
MB Cap Ultra 10/24 38s	Nominal voltage: 12 V/24 V DC, output voltage: 12 V/24 V DC, max. output current: 10 A Buffer time: 38 sec/10 A, > 6 min/1 A	85467
	The MB Cap Ultra Control software and the manual are available for download under www.murrelektronik.com	
Emparro Cap 20/24 1.0s	Description	Art. No.
	Nominal voltage: 24 V DC, output voltage: 24 V DC, max. output current: 20 A Buffer time: 1.0 sec/20 A	85458
MB Cap Ultra 20/24 16s	Description	Art. No.
	Nominal voltage: 24 V DC, output voltage: 24 V DC, max. output current: 20 A Buffer time: 16 sec/20 A, > 5 min/1 A	85468
	The MB Cap Ultra Control software and the manual are available for download under www.murrelektronik.com	
MB Cap Ultra 40/24 3.6s	Description	Art. No.
	Nominal voltage: 24 V DC, output voltage: 24 V DC, max. output current: 40 A Buffer time: 3.6 sec/40 A, 170 sec/1 A	85469
Emparro Cap 40/24 0,3s	Description	Art. No.
	Nominal voltage 24 V DC, output voltage: 22,5 V DC, max. output current 40 A Buffer time: min. 0,3 sec /40 A, min. 1,2 sec /10 A, min. 2,4 sec /5 A, min. 8 sec /1,5 A	85464
Emparro Cap 20/48 0,1s	Description	Art. No.
	Nominal voltage 48 VDC, output voltage: 48 VDC, max. output current 20 A Buffer time: 0.1 sec/20 A, 2.5 sec/1 A	85459

Emparro ACCUcontrol



Keeping machines running

The UPS module Emparro ACCUcontrol supplements the powerful Emparro power supply system. If there is a power failure, it switches to battery mode without interrupting power, thus preventing machine downtimes. Investment in a UPS system frequently pays for itself after the first failure is prevented.

External lead batteries with a capacity of up to 40 Ah ensure a long-lasting autonomy time. Emparro ACCUcontrol can be assembled without a tool and is maintenance-free. The 20-A version is only 65 millimeters wide and therefore takes up very little space in the control cabinet.

Reliable power supply in case of malfunction

- Avoid machine downtimes in case of a power outage
- Maximum service life due to temperature-controlled battery charging
- High operating reliability due to comprehensive control and diagnostic options
- Prevent data loss using the shutdown function for IPCs

UPS-System

- up to 40 Ah
- comprehensive diagnostics



Emparro ACCUcontrol



Ordering data

	Current	Art. No.	Current	Art. No.
Input	20 A	85414	40 A	85415
Input voltage	21.6...30 VDC (buffer operation)			
Input current	max. 23 A		max. 43 A	
Charging current	2 A			
Output				
Output voltage	27.2...19.2 VDC			
Output current	max. 20 A		max. 40 A	
Control inputs				
Input voltage (SH)	24 VDC (6...45 VDC), potential free			
Control outputs				
Battery (BAT OK)	min. 5 VDC, 1 mA; max. 30 VDC, 100 mA			
Input voltage (UIN OK)	min. 5 VDC, 1 mA; max. 30 VDC, 100 mA			
General data				
Connecting type	> Push-In Spring clamp terminal, Mini-USB			
Mounting method	Snaps onto mounting rails TH35-7.5/TH 35-15 (EN 60715)			
Temperature range	-25...+45 °C			
Dimensions (W x H x D)	123 x 65 x 138 mm		123 x 85 x 138 mm	

Emparro ACCUcontrol



Emparro ACCUcontrol

Predictive Maintenance

Get informed before failure

Emparro ACCUcontrol permanently monitors the internal resistance of connected batteries. If limits are exceeded, the device gives a warning signal over an alarm contact. The battery replacement can then be scheduled for the next maintenance period. This predictive information prevents unplanned failures from happening and keeps you from having to send service technicians into the field for small jobs.

Maximum life time

The cooler, the better

Batteries perform better and they live longer in cooler temperatures. As a result, Emparro ACCUcontrol can charge batteries based on temperature. The charging voltage is adapted to the ambient temperature. This feature allows you to achieve maximum battery life, even in a high temperature environment.tures.

Accessories

Art No.

			Art No.
	Lead battery 1.2 Ah 96x69x105 mm/2 kg	for Emparro® ACCUcontrol	89550
	Lead battery 7 Ah 115x174.5x159 mm/2.32 kg	for Emparro® ACCUcontrol	89552
	Lead battery 12 Ah 115x240.5x159 mm/3.7 kg	for Emparro® ACCUcontrol	89553
	Lead battery 17 Ah 170x155x182 mm/18 kg	for Emparro® ACCUcontrol	89554
	Lead battery 24 Ah 137x335x200 mm/20 kg	for Emparro® ACCUcontrol	89555



Transformers with multi-voltage input



Stock up on safety!

A switch-mode power supply doesn't match your requirements? Murrelektronik's transformers or rectified power supplies offer another option!

Plant and system manufacturers with international customers are familiar with the problem of different mains voltages. The new Murrelektronik transformer with multi-voltage input features clear advantages: This universal solution can handle input voltages from 208 to 550 V. This is ideal for companies who have customers all over the world.

The new Murrelektronik transformers with multi-voltage input are suitable for worldwide use. They feature a flexible selection of input voltages and can be adapted to the different mains voltages by simple bridging. The same transformer can be used for any machine, worldwide. A total of eleven different input voltages from 208 to 550 Volts are pre-configured.

The new Murrelektronik transformers are available with two times 115 Volts or – with series connection – 230 Volts. This makes it possible to conveniently handle the various operating voltages of the machines.

Power	Input	Output	Art. No.
25 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86140
40 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86141
63 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86142
100 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86143
160 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86144
250 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86145
320 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86146
400 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86147
500 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86148
630 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86149
800 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86150
1000 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86151
1600 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86152
2000 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86153
2500 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86154
3000 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86155
4000 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86156
5000 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86157
6300 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86158
8000 VA	208/230/380/400/420/440/460/480/500/525/550 VAC	2 x 115 VAC	86159

Safety transformers

	Power	Input	Output	Art. No.
MTS	40 VA	230/400 V AC	24 V AC	86340
	63 VA	230/400 V AC	24 V AC	86341
	100 VA	230/400 V AC	24 V AC	86342
	160 VA	230/400 V AC	24 V AC	86343
	250 VA	230/400 V AC	24 V AC	86345
	40 VA	230/400 V AC ± 15 V	24 V AC	86360
	63 VA	230/400 V AC ± 15 V	24 V AC	86361
	100 VA	230/400 V AC ± 15 V	24 V AC	86362
	160 VA	230/400 V AC ± 15 V	24 V AC	86363
	250 VA	230/400 V AC ± 15 V	24 V AC	86365
MST	Power	Input	Output	Art. No.
	320 VA	230/400 V AC	24 V AC	86326
	400 VA	230/400 V AC	24 V AC	86327
	500 VA	230/400 V AC	24 V AC	86328
	630 VA	230/400 V AC	24 V AC	86329
	800 VA	230/400 V AC	24 V AC	86330
	1000 VA	230/400 V AC	24 V AC	86331
MET	Power	Input	Output	Art. No.
	500 VA	230 V AC ± 5 V	24 V AC	86023
	630 VA	230 V AC ± 5 V	24 V AC	86033
	800 VA	230 V AC ± 5 V	24 V AC	86043
	1000 VA	230 V AC ± 5 V	24 V AC	86053
	500 VA	400 V AC ± 5 V	24 V AC	86024
	630 VA	400 V AC ± 5 V	24 V AC	86034
	800 VA	400 V AC ± 5 V	24 V AC	86044
	1000 VA	400 V AC ± 5 V	24 V AC	86054

Control and isolation transformers

MTS	Power	Input	Output	Art. No.
	40 VA	230/400 V AC	230 V AC	86346
	63 VA	230/400 V AC	230 V AC	86347
	100 VA	230/400 V AC	230 V AC	86348
	160 VA	230/400 V AC	230 V AC	86349
	250 VA	230/400 V AC	230 V AC	86351
	40 VA	230/400 V AC ± 15 V	230 V AC	86366
	63 VA	230/400 V AC ± 15 V	230 V AC	86367
	100 VA	230/400 V AC ± 15 V	230 V AC	86368
	160 VA	230/400 V AC ± 15 V	230 V AC	86369
	250 VA	230/400 V AC ± 15 V	230 V AC	86371
MST	Power	Input	Output	Art. No.
	320 VA	230/400 V AC	230 V AC	86306
	400 VA	230/400 V AC	230 V AC	86307
	500 VA	230/400 V AC	230 V AC	86308
	630 VA	230/400 V AC	230 V AC	86309
	800 VA	230/400 V AC	230 V AC	86310
	1000 VA	230/400 V AC	230 V AC	86311
MET	Power	Input	Output	Art. No.
	500 VA	230 V AC ± 5 %	230 V AC	86020
	630 VA	230 V AC ± 5 %	230 V AC	86030
	800 VA	230 V AC ± 5 %	230 V AC	86040
	1000 VA	230 V AC ± 5 %	230 V AC	86050
	1500 VA	230 V AC ± 5 %	230 V AC	86060
	2000 VA	230 V AC ± 5 %	230 V AC	86070
	3000 VA	230 V AC ± 5 %	230 V AC	86090
	4000 VA	230 V AC ± 5 %	230 V AC	86110
	5000 VA	230 V AC ± 5 %	230 V AC	86130
	500 VA	400 V AC ± 5 %	230 V AC	86021
	630 VA	400 V AC ± 5 %	230 V AC	86031
	800 VA	400 V AC ± 5 %	230 V AC	86041
	1000 VA	400 V AC ± 5 %	230 V AC	86051
	1500 VA	400 V AC ± 5 %	230 V AC	86061
	2000 VA	400 V AC ± 5 %	230 V AC	86071
	3000 VA	400 V AC ± 5 %	230 V AC	86091
	4000 VA	400 V AC ± 5 %	230 V AC	86111
	5000 VA	400 V AC ± 5 %	230 V AC	86131





stay connected

www.murrelektronik.com

The information contained herein has been compiled with the utmost care.
Liability for the correctness, completeness and topicality of the information
is restricted to gross negligence.

Our company embraces social responsibility in all aspects of our business
activities. Our brochures are printed using environmentally friendly
production techniques and products.

